



For Smarter Future

Project _____

Contractor _____

Model No. _____

Edge-lit LED Panel



OVERVIEW


AVOVO Edge-lit LED Panels have a slim design that provides premium performance and pleasing aesthetics. This series is optimized for tight grid ceilings but may also be surface mounted. These panels are ideal in place of traditional luminaries, or as new installations. The panels refined visual optics, superior non-glare lighting and integrated grid retention clips provide the features needed for installation, speed and flexibility. ELP series is an excellent lighting solution for commercial offices, schools, hospitals/clinics and retail merchandising areas.




www.avovo.ca

DIMENSIONS

Side View



Top View

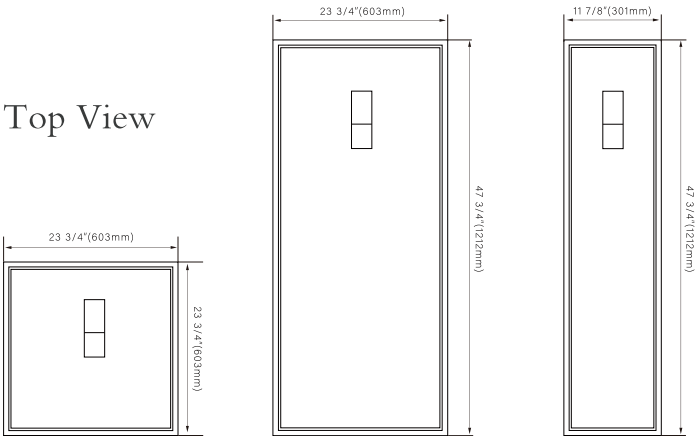


SPECIFICATION

Model No.	Size	Watts	CCT(K)	Lumen Output (125 lm/w)	Beam Angle	Input Voltage
ELP24-50W-XXXXK	2x4 feet	50W	4000K, 5000K	6250 lm	120°	AC100-277V, 50/60Hz
ELP22-40W-XXXXK	2x2 feet	40W	4000K, 5000K	5000 lm	120°	AC100-277V, 50/60Hz
ELP14-40W-XXXXK	1x4 feet	40W	4000K, 5000K	5000 lm	120°	AC100-277V, 50/60Hz
ELP24-50W-XXXXK-HV	2x4 feet	50W	4000K, 5000K	6250 lm	120°	AC100-347V, 50/60Hz
ELP22-40W-XXXXK-HV	2x2 feet	40W	4000K, 5000K	5000 lm	120°	AC100-347V, 50/60Hz
ELP14-40W-XXXXK-HV	1x4 feet	40W	4000K, 5000K	5000 lm	120°	AC100-347V, 50/60Hz

FEATURES

- Durable aluminum white frame, comes complete with earthquake clips.
- Ultra-thin thickness in approximate 3/8”, extremely slim and beautiful.
- Anti-yellow PMMA diffuser prevents hot spots, shadows and glare.
- 125 lm/w brightness LED with over 50,000 hours estimated lifespan.
- High quality electronic driver with 0-10V dimming standard, flicker free.
- Mount in recessed grid ceiling. (Surface mounting kits as optional.)

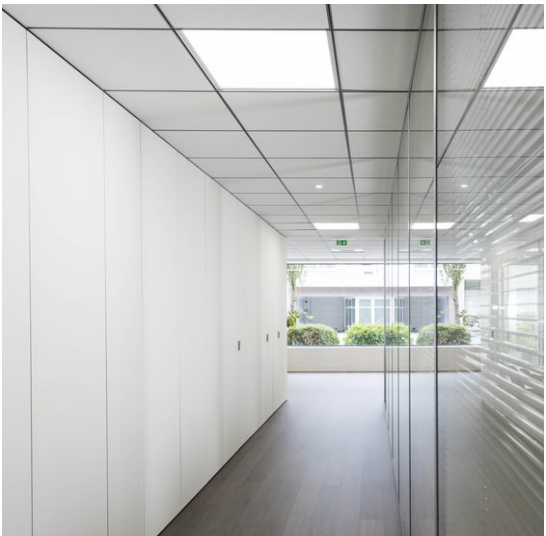

PMMA
Anti-yellow

Ra>80

PH>0.9

Flicker Free

Dimmable