




For Smarter Future

Project _____

Contractor _____

Model No. _____

LED Linear High Bay

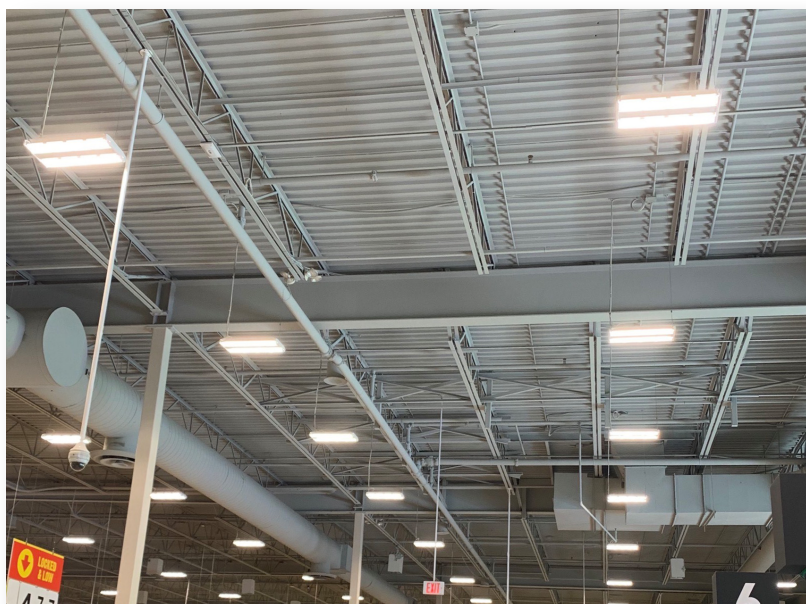

OVERVIEW

AVOVO LED Linear High Bay luminaires are designed for a wide variety of applications and mounting heights while providing premium performance, quality and versatility. With up to 60% lower energy consumption compared to traditional fluorescent and HID fixtures, the LHB series is ideal for high ceilings in warehouses, manufacturing facilities, gymnasiums, and retail applications.




SPECIFICATION

Model No.	Size	Watts	CCT(K)	Lumen Output (130 lm/w)	Beam Angle	Dimensions L x W x H	Input Voltage
ALH12-165W-XXXXK-HV	1x2 feet	165W	4000K, 5000K	21450 lm	110°	12.6"x23.8"x2"	AC100-347V, 50/60Hz
ALH22-220W-XXXXK-HV	1½x2 feet	220W	4000K, 5000K	28600 lm	110°	17.4"x23.8"x2"	AC100-347V, 50/60Hz
ALH14-165W-XXXXK-HV	1x4 feet	165W	4000K, 5000K	21450 lm	110°	12.6"x46.0"x2"	AC100-347V, 50/60Hz
ALH14-225W-XXXXK-HV	1x4 feet	225W	4000K, 5000K	29250 lm	110°	12.6"x46.0"x2"	AC100-347V, 50/60Hz

FEATURES

- Compact, lightweight design for ease of installation.
- Made with cold forged steel in white polyester powder coating.
- Standard PC lens provide added protection and glare control.
- 130 lm/W LED provides high efficacy and energy efficiency.
- Color temperatures available: 4000K and 5000K.
- Top quality drivers: 0-10V dimming, flicker free.
- Microwave & PIR sensor is also available.
- Ideally suited for suspension mounting.

PHOTOMETRIC DATA

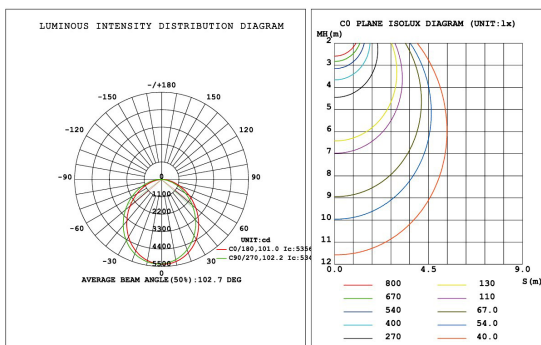

DIMENSIONS

